Permanent

App F IX 4

1932 — (mL) — 17/12/31

File No 222-32

Serial Nos 1-2

Previous References

mL 23 31 37 62, 66 67, 51,
" 77-30-7 to 10

Later References

mL 23-34 (67, 68, 85)

PRESERVED

General and Revenue Secretariat

Serial Nos

Part B for January 1933

SUBJECT

Relaxation of the sanction out of Rs 50 000/- sanctioned for the drainage work in Maudi Mohalla Mysore City for extension of underground drainage system in the unreserved contiguous blocks in the same Mohalla

Sl 2

The Chairman Impt Trust Bd Mysore
Comptroller to Govt
Chief Engineer of Mysore

No L 4639 41/mL of 18/1/33

Sanction the ———

Drainage Scheme / Manor Mohalla
L 3020

[App F III—2

neral and Revenue Secretariat — File No 222 of 1932

Serial No	
1	Letter no 736 dated 6th Jany 1933 from the Chairman City Improvement Trust Board requesting Sanction for utilizing the Savings effected in the Sanctioned Scheme for drainage works in Manor Mohalla, for the extension of underground drainage System in the unsewered contiguous blocks in the Same Mohalla and for distributing the work among the contractors who have tendered for the Whole Scheme + The Chairman States that there has been a Saving of Rs 19,150/- during execution excluding a Sum of Rs 3,900/ reserved for Surface connections and other Subsidiary works connected therewith in the blocks already already Sanctioned owing to great reduction in the cost of materials and Savings effected during execution in the Shape of Labour etc 2 Submits with a draft Sanctioning with reference for approval orders

GENERAL SECRETARIAT
16 1 33

Genl Secy) 3 MSK 15/1/33

RG 16/1/33

Dewan

MSK 16/1/33

M 16-1-32

RG 17/1/33

MSK

DL OFFICE
1933

NOTE—Contn Sheet.

WD 70—GBPM—60 000—13 8 31

File No 130-N/122 of 1932	General and Revenue Secretariat
Issued vide 4639-41 of 18/1/33 to Chairman Municipal Committee, Sanchore re proposals.	2
	-
	19/1/33

~~Ml 246-31-10~~

736
Encls 1 Boards Resln
2 Reports
6 plans
8 estmates
17

OFFICE OF THE CHAIRMAN
CITY IMPROVEMENT TRUST BOAR
MYSORE

Dated 3rd January 1933

Ml 222-32-1/6

GEN & REV SECTT
3020
7-1-33
L. & E. BRANCH.

FROM

B T KESAVAIENGAR ESQUIRE B A

CHAIRMAN CITY IMPROVEMENT TRUST BOARD

MYSORE

To

The General Secretary,
to the Government of His Highness the Maharaja
of Mysore, Bangalore

GENERAL SECRETARY
7 JAN 1933
No. 599

Sir

Adverting to Government order No L 4343-5/M1 23-30-42 dated 15/16 December 1932 sanctioning an estimate amounting to Rs 50,000/- for drainage works in Kandi mohalla to be worked out of the loan of Rs 50,000/ sanctioned to the Mysore City Municipal Council in G O No L 312-13/M1 77-30-10 dated the 11th July 1931 and corresponding ending with G O No L 5350-2/M1 23-31-51 dated 28/30th January 1932 sanctioning the splitting up the whole work into six divisions and entrusting it to six different contractors after calling for tenders etc , I have the honor to state that there has been a saving of nearly Rs 19,150/- during execution excluding a sum of Rs 3,000/- reserved for giving free house connections and other subsidiary works connected therewith in the blocks already sanctioned owing to great reduction in the cost of materials and savings effected during execution in the shape of labour etc ,

It has been now proposed to utilise this savings by the extension of sewer lines in unsewered areas in the same mohalla Viz - in Blocks No 7,10 and 15 The estimates and plans relating to the extension of sewer lines in the afore-said blocks were placed before the Board of Trustees at their meeting held on 25th November 1932 and a copy of the Resolution thereon is appended for reference

The note accompanying the plans and estimates explains the

the nature and necessity for the work

Under these circumstances, I request that you will be so good as to obtain early orders of Government for utilising the savings effected in the sanctioned scheme for the extension of underground drainage system in the unsewered contiguous blocks in the same mohalla and for distributing the work among the contractors who have tendered for the whole scheme, this being a part and parcel of the original sanctioned scheme

I have the horor to be,

Sir,

Your most obedient servant,

Chairman,

Proceedings of the ordinary meeting of the Board of Trustees for the Improvement of the City of Mysore held at the Chairman's office on ~~Saturday~~ Friday the 25th November 1932 at 8 A M

Present

B T Kesavaiengar, Esquire , L A , (Chairman)

1 Sir Charles Todhunter K C S I ,

2 The Vice-President, City Municipal Council, Mysore

3 The Health Officer, -do-

4 Mohamed Sait, Esquire ,

5 C Narasimhaiya, Esquire,, L A , B L ,

6 A Krishna Rao, Esquire , B A , B L ,

Absent

1 The Director of Health in Mysore

2 J J Fieldazis, Esquire , B Sc , B E , Consulting Sanitary Engineer, Rockfeller Foundation

x x

XXV Note on urgent drainage works in Mandi mohalla

Approved

Sd B T Kesavaiengar,
Chairman

"copy"

Chairman

NOTE ON URGENT DRAINAGE WORKS IN MANDI MOHALLA

Government order No L 312-7/M1 77-30-10 dated 11th July 1931 sanctioning a loan of Rs 50,000/- to the Mysore City Municipal council for the execution of urgent drainage works in Mandi mohalla.

Government order No L 4343-5/M1 93-31-42 dated 15/16th December 1931 sanctioning an estimate for Rs 50,000/- for drainage works in Mandi mohalla

The area comprising blocks 4,5 and 6 situated between Kalamma temple road and Sayaji Rao road East to West and Mandi Market and Railway station roads north to south was proposed to be treated with complete underground sewerage system as per the above Government order Excepting a short length of 100' line to be laid in block No 5 all lines as sanctioned have been laid and completed house connections to those houses whose internal drainage was fairly satisfactory have been given in the sewered areas The health officer has been requested to issue notices to the parties for setting right the internal drainage and to take extra connections at their cost The experditure up to date on laying of lines, construction of man-holes and giving house connections comes to Rs 27247/- The reason for the abnormal savings in the sanctioned estimate is due to great reduction in materials and to non giving of house connections to such of the houses whose internal drainage is bad Reserving about Rs 3,900/- for some more house connections and other works to be executed, the savings of Rs 19,150/- may with advantage be utilised for the extension of drainage lines in blocks No.7 and ~~10~~ 10 which ~~abut~~ abut the sewered areas and to give sewerage connection to the Wesleyan Mission Hospital The estimated amount for completing the sewer lines in these two bloks comes to Rs 19 150/- The area is approximately situated to the north of Block No 4, and lies between Sayaji Rao and Benki Nawab roads

Sanction may kindly be accorded to the proposal

completing the sewerage system		
1	In Block No 7,	Rs 7,500/-
2	" 10	10,500/-
3	Giving sewerage connection to the Wesleyan Mission Hospital	1,150/-

Chairman

Mysore City Improvement
Trust Board

— "Duplicate" —

Estimate for laying sewerage line and house connections in Block No 10 Block No 7 and at the Northern & western side of Mission Hospital in Idiga Mandi Mohalla Mysore

Completing sewerage System for a portion in Mandi Mohalla

Amount of estimate Rs 19150/-

Mysore City Improvement Trust Board

General abstract of estimate for laying Sewerage line and house Connections in Block No 10 Block no 7 and at the Northern & western Side of Mission Hospital in Idiga Mandi Mohalla Mysore Completing Sewerage System for a portion in Mandi Mohalla

Name of work	Amount
Estimate for laying Sewerage and house Connections in Block No 10 No II Drainage Area -	11 300
Estimate for laying Sewerage and house connections in Block No 7 No II Drainage Area	6700
Estimate for laying 7 Sewer line at the Northern & western Side of Mission Hospital in Idiga Mandi Mohalla Mysore	1150
Grand total rupees	19150

Trust Board Engineer

Chairman

GRK

Compared 30-12-32

City Improvement Trust Board

Estimate for laying Sewerage and house connections

Title. No 10 No II Drainage Area

Particulars of work			No	Dimensions in feet L	B	D	Content	Total	Unit	Rate Rs	A	P
Laying Submain -												
earth work excavation and refilling												
From man-hole	25	to	23	1	119	2½	4¼	1264				
	23	to	8	1	130	2½	7¼	2356				
	8	to	9	1	74	2½	7¼	1341				
	8	to	A	1	210	2½	6½	3412				
	A	to	5	1	80	2½	6	1200				
	17	to	18	1	73	2½	4¾	926				
	18	to	5	1	129	2½	4¾	1532				
	5	to	9	1	202	2½	6	3030				
	9	to	10	1	72	2½	5¾	1035				
	10	to	21	1	137	2½	4¾	1627				
	21	to	26	1	113	2½	4½	1271				
	10	to	11	1	58	2½	5¼	761				
	11	to	17	1	99	2½	5	1237				
	17	to	16	1	136	2½	5½	1870				
	17	to	18	1	65	2½	4½	731				
	18	to	20	1	65	2½	5	812				
	18	to	4	1	136	2½	4½	1530				
	15	to	13	1	150	2½	5½	2062				
	13	to	12	1	90	2½	4½	1012				
	11	to	12	1	40	2½	4½	450				
	12	to	4	1	167	2½	5	1962				
	4	to	1	1	134	2½	5	1675				
	1	to	18	1	88	2½	5	1100				
	1	to	37	1	28	2½	4¾	332				
	37	to	38	1	96	2½	4¾	1021				
	38	to	39	1	78	2½	5¼	1024				
	39	to	B	1	111	2½	5¼	1457				
	35	to	3		853	2½	6	2745				
	3	to	4	1	90	2½	5½	1237				
	2	to	14	1	172	2½	6	2580				
	13	to	14	1	82	2½	5½	127				
	14	to	3	1	77	2½	4½	816				
	4	to	5	1	90	2½	5	1237				
Total carried over								46585	1725			

Brought forward				725					
Soft rock & moram 1/3 quantity				575	cyd		12	0	4
Ordinary Soil 2/3 do				1150			6		4
Earthg, layeng & jettieng 7 stone vara pipes excludeng cost	1	3217	3217	3217	Rft	-	14	9	2 9
Earthg layeng & jettieng 7X4 R. gun pipes excludeng cost	1	252	252	252	do	1	10	0	41
House connections	84		84	84	Each	30	0	0	25
Rectangulare Man-holes	~~24~~ 4	-	~~24~~ 4	4	do	130			
Square Man-holes	24		24	24	do	140			33
Surplus earth	1	1725/6	287	287	cyd	0	3	0	
Total									106
Contengencies etc									6
Grand total Rupees									11.

Compared
20-12-32

Executive Engr
Trust Board Engrs

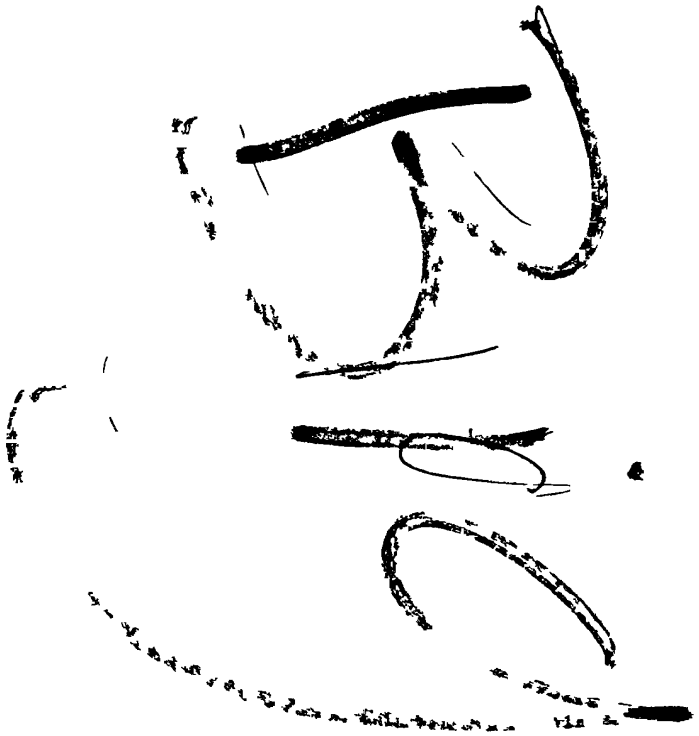

Brought forward				1725			
				s	d		
						12	0	431

Estimate for laying Sewerage and House connections in Block No 7 & 11 Drainage Area by Improvement Trust Board

Particulars of work	No	Sewer work in feet L	B	D	Content	Total	Per	Rate			Cost
Laying Sub mains -											
with brick excavation and refilling -											
From Man holes 1 to A 2	1	116									
" 42 to 43	1	172									
" 43 to 44	1	70									
44 to 45	1	88									
6 to 5	1	129									
28 to 29	1	139									
45 to 45A	1	120									
24 to 25	1	60									
32 to 21	1	150									
16 to 15	1	119									
41A to 41B	1	150									
7 to 7A	1	165									
7A to 41	1	90									
12 to 13	1	65									
B to EXHX	1	65									
Total		1678	2/2	6	25170	932					
Soft rock & moram 1/2 quantity						311	Cyd	0	12	0	233
ordinary 2/3 do						621	do	0	6	0	233
Laying laying & fitting 7 stone ware en luding Cost	1	1428			1428	1428	Rft	-	14	9	1316
do 7X4 R jun including Cost	1	250			250	250	Rft	1	10	0	47
Rectangular Man holes	3	-			3	3	Each	130			390
Square do	8		-		8	8	Each	140			1120
Ventilating shaft	1				1	1	Each	120			120
Surplus earth	1	932/6			155/75	155	Cyd	½	3	0	20
House connections	75				75	75	Each	30	0	0	225
Total											6097
Contingencies such as levelling, fencing, shoring & other unforeseen items											69
Grand total rupees											6766

Compared 7-12-32

Trust Board Engineer

Mysore [redacted] Improvement Trust Board

Estimate for laying 7 Sewer line at the northern side of Mission Hospital in Tolga Mandi Mohalla Mysore

Items of work	No	Dimensions			Quantity	Per	Rate			Cost
Earth work excavation and refilling ordinary soil										
1 to existing Man-Hole	1	205	2½	Ave 5	2562					
2 to 3 "	1	154	2½	6	2310					
3 to Existing Man-Hole	1	154	2½	6	2310					
Total in cft					7182					
do cyds					266					
2/3 Ordinary soil					178	Cyd	0	6	0	67
1/3 Soft rock & Murum soil					88	do	0	12	0	66
Carting laying & fitting 7 pipes including cost	1	513			513	Rft	0	14	9	474
Rectangular Man-Hole	2				2	Each	130	0	0	260
Sq^r Man Hole	1				1	do	160	0	0	160
Carting Surplus earth		266/6			44	Cyd	0	3	0	9
Boaring hole in the Man-Hole					2	Each	2	8	0	5
Total Rupees										1021
Contingencies for unforeseen items										129
Grand Total Rupees										1150

30-12-37

Trust Board Engineer

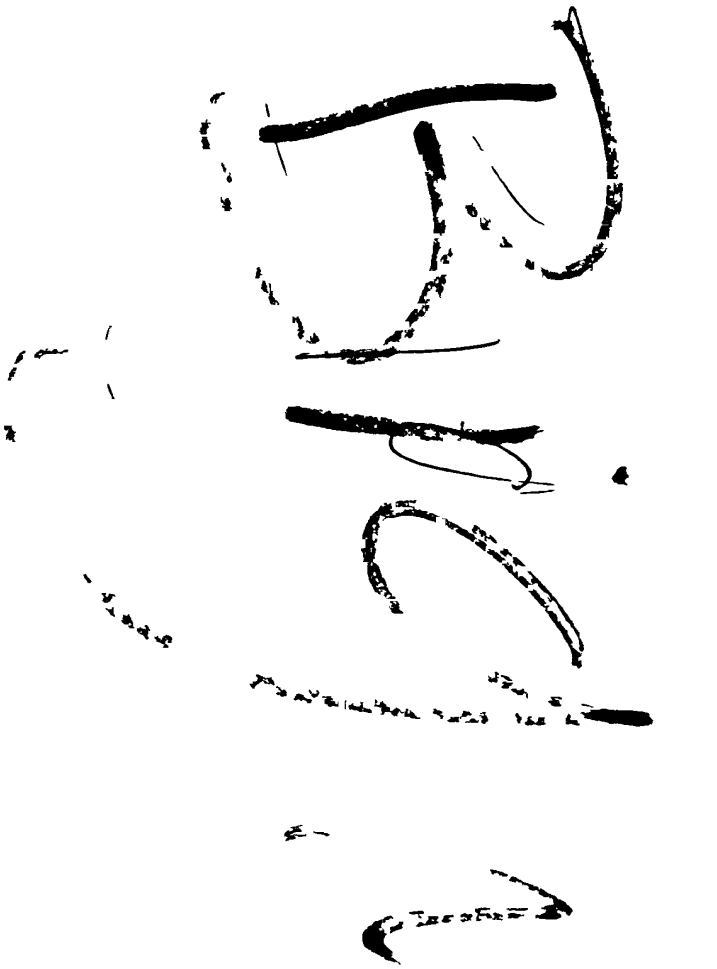

G R S App F VI—G 21

SUBJECT Drainage scheme, Mandi mohalla

Diary No of letter replied to L 3020

Section Rul

File No 222-32

Serial No 2

General and Revenue Secretariat

(Rul)

the 193

Proceedings of the Government of His Highness the Maharaja of Mysore

Date of issue 18/1/33

Signed by Mr RSK

May this be—

(i) printed ? Q

(ii) treated as a standing order ?

(iii) published in the Gazette English part ?

( ) translated ?

(v) placed at the disposal of the press ?

(vi) published in the Gazette Kannada part ?

Read— 1) Go no L 43443-5 Rul 23-42 dated 16/12/31, Sanctioning an estimate for Rs 50,000/- for drainage works in Mandi mohalla, Mysore city

2) Go no L 5350-2 Rul 23-dated 30/1/32 Sanctioning ~~Order thereon~~ No proposal Municipal Trust Board Mysore, to split up the Scheme into Sections to entrust the work to Six diff Contractors, after calling for tenders instead of entrusting the work to one individual

B & D 3) Letter no 736 of 6/1/33

Rul 18/1/33

The Chairman City Improvement
Trust Board Mysore Stating that
he has been a saving of nearly
Rs 19,150/- during execution excluding
Rs 3,900 reserved for giving
house connections and other
ordinary works connected therewith
& requesting sanction to utilize
savings for the extension of
Underground drainage system
the unsewered contiguous blocks
the same mohalla and for distributing
work among the contractors
to have tenders for the whole
scheme

Order L 4639-41 dt 18-1-33
Sanctioned

List of Enclosure

RG
16/1/33

Addl Chief Engineer to Govt

88

The Chairman Improvement Trust Board 10/1/33 *Copied by*
with plan & estimate

The Comptroller to Govt *Examined by*

The Chief Engr of Mysore

WD 0°04—G1B—10 000—22 8 32

PROCEEDINGS OF THE GOVERNMENT OF HIS HIGHNESS
THE MAHARAJA OF MYSORE

Read –

Government Order No L 4343-5 Ml 23-31-42 dated 16th December 1931, sanctioning an estimate for Rs 50,000/- for drainage works in Mandi Mohalla, Mysore City

2 Government Order No L 5350-2 Ml 23-31-51 dated 30th January 1932, sanctioning the ~~xxxxxxxxx~~ proposal of the Chairman Trust Board, Mysore, to split up the scheme sanctioned in the Government Order read above into six divisions and to entrust the work to six different contractors, after calling for tenders instead of entrusting the work to one individual

3 Letter No 736 dated 6th January 1933, from the Chairman, City Improvement Trust Board, Mysore, stating that there has been a saving of nearly Rs 19,150/- during execution of the drainage scheme sanctioned in the Government Orders read above excluding a sum of Rs 3,900 reserved for giving free house connections and other subsidiary works connected therewith, and requesting sanction to utilize the savings for the extension of underground drainage system in the unsewered contiguous blocks in the ~~the~~ same mohalla and for distributing the work among the contractors who have tendered for the whole scheme

---

ORDER NO L 4639-41/ Ml 222 32-2

Dated, Bangalore, the 18th January 1933

Sanctioned

M S Krishnamacha
For General Secretary to Government

The Chairman, Trust Board, with plans and estimates.
The Comptroller to Government
The Chief Engineer of Mysore

P 4/18-1